


New Working New Living

Website: www.flexispot.com

Tel: 1-855-585-5618


Address: 6475 Las Positas Rd. Livermore, CA 94551

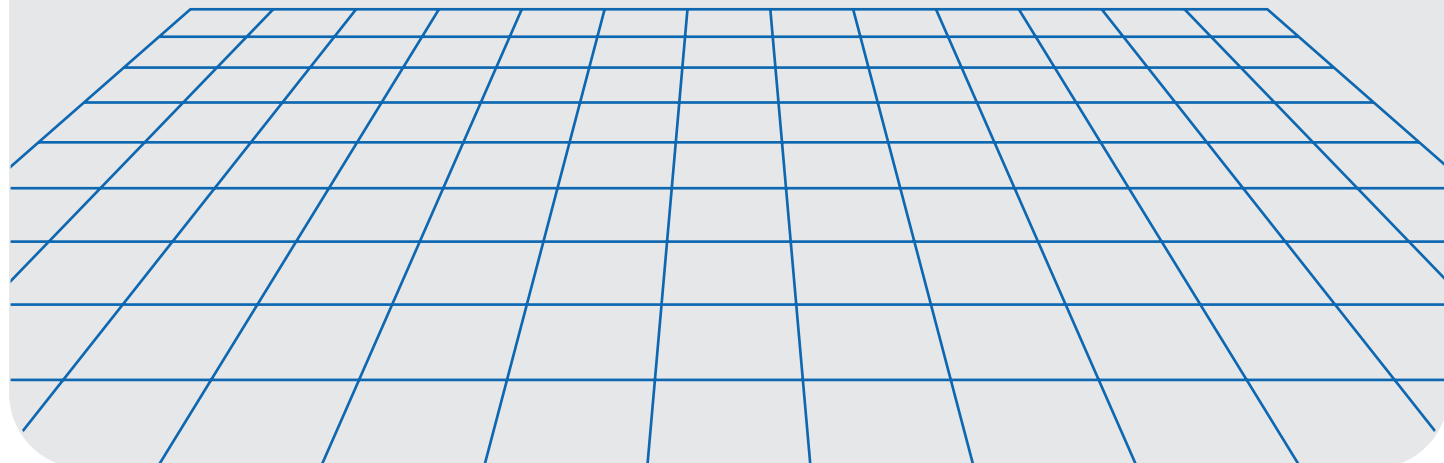

FlexiSpot

User Manual

Item No. MA6W-S/MA6S-S

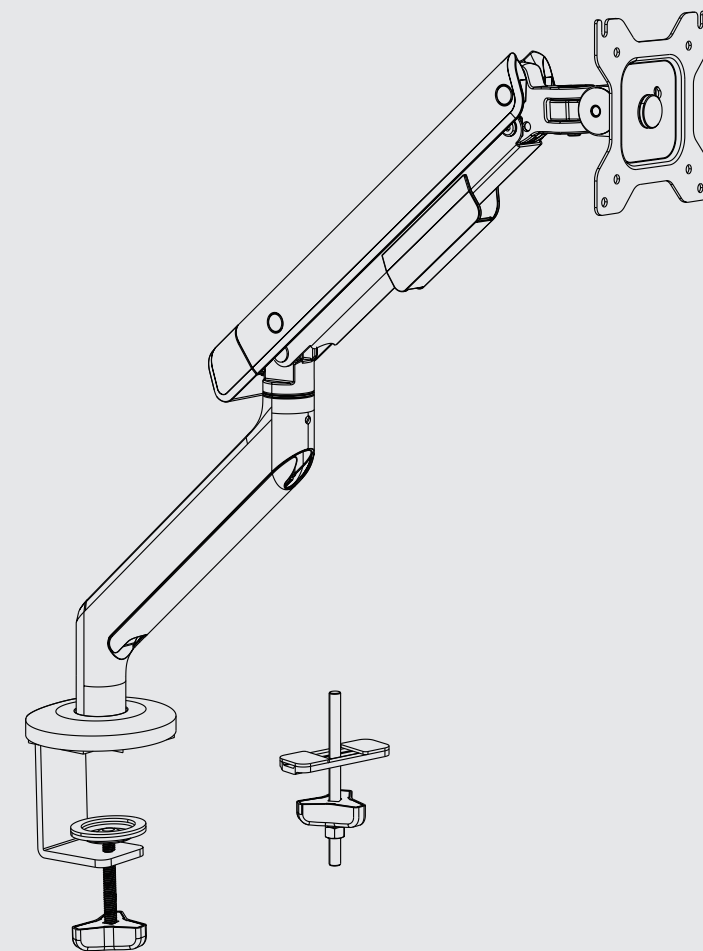

INSTRUCTIONS –
KEEP FOR FUTURE REFERENCE

Specifications

Adaptive display size	17"~35" (non-curved)
Safe weight bearing range	4.41~19.8lbs
Monitor stand head tilt angle	-80°~+15°
Suitable display mounting holes	75×75mm or 100×100mm

Accessory Package




Warning: Choking hazard! This product contains small parts. Keep them out of reach of children.

Parts Included

G		N	
H		O	
I		P	
J		Q	
K		R	
L		S	
M		T	

ATTENTION

Do not adjust tension without monitoe attached.
Ensure monitor has been securely attached to the mount.

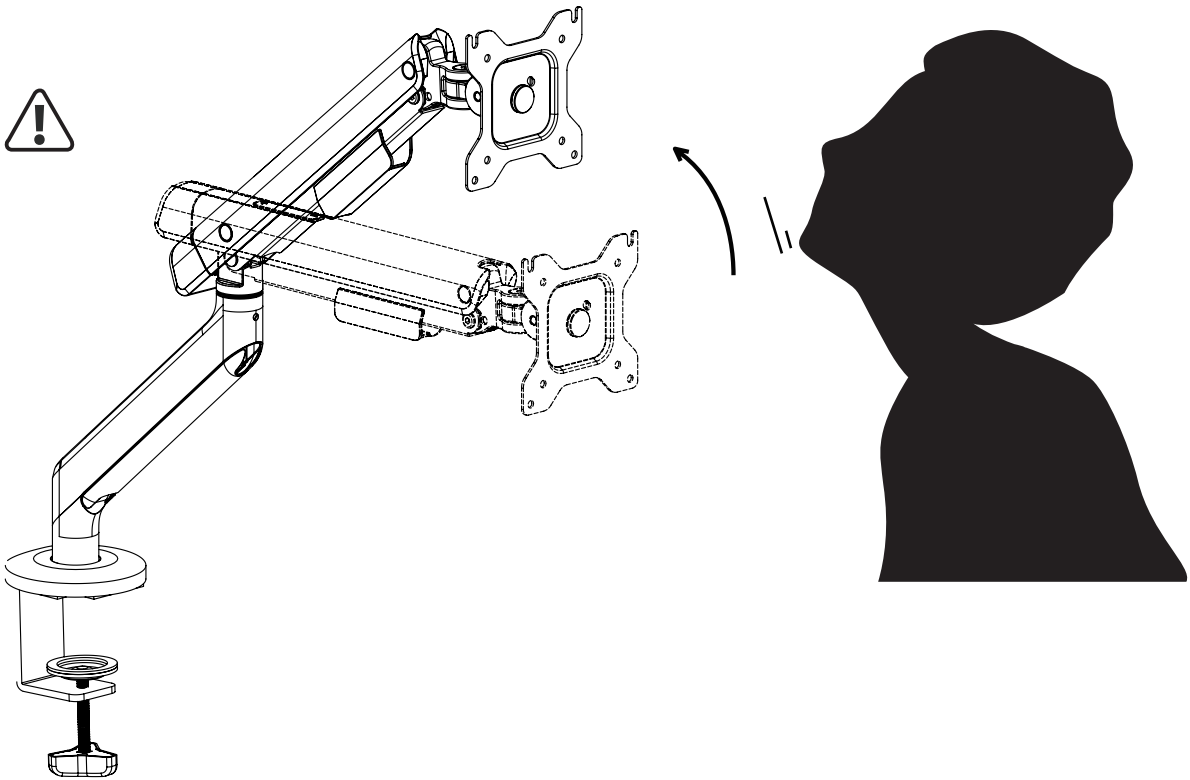


WARNING

- 1. Gas spring arm is under pressure and should be handled with care.
- 2. Make sure you have read the manual thoroughly before installation and fully understand how to install it.If you do not understand any of the installation steps, please contact the seller. Failure to follow the instructions may result in damage to the mount and/or personal injury.

1 Preparation


1. Check the monitor for mounting holes (75×75mm or 100×100mm). If there are no mounting holes, the bracket cannot be installed. **(Note: Some monitor mounting holes are used to attach the original mounting base, which is removable.)**
2. Remove the original mounting base from the monitor (the method varies depending on the monitor). During the entire removal process, avoid scratching the monitor panel with hard objects.

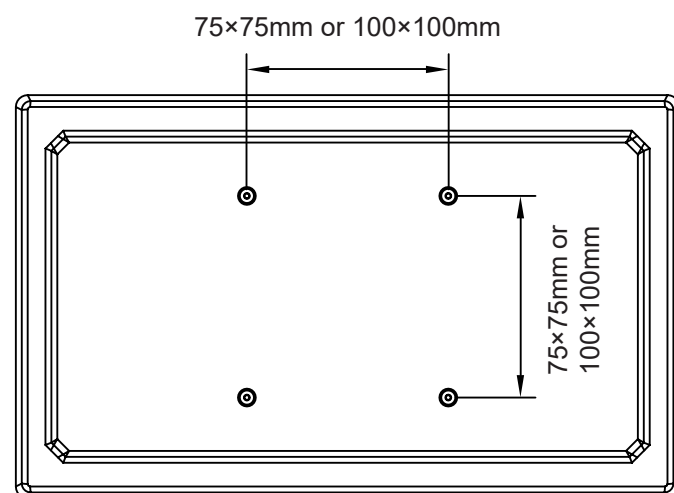



2 Base Installation

2-1 Clamp Installation


Tabletop

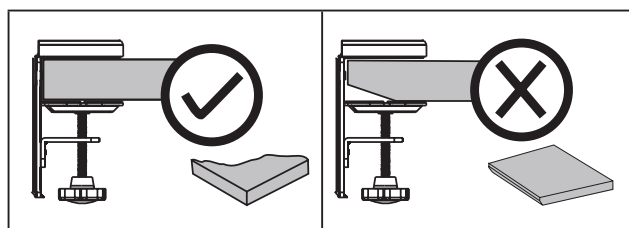


Note: This installation is suitable for tabletops with right angles at the top and bottom. Do not use tabletops with irregularly shaped mounting surfaces to prevent the clamping components from slipping!

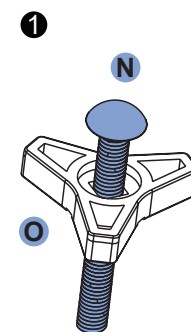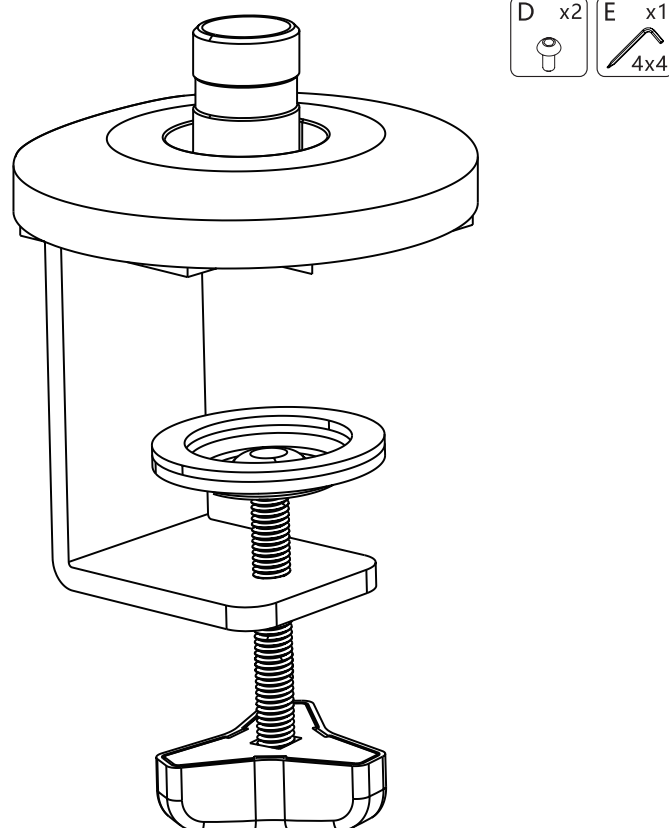


Insert the long screw into the square hole of O.

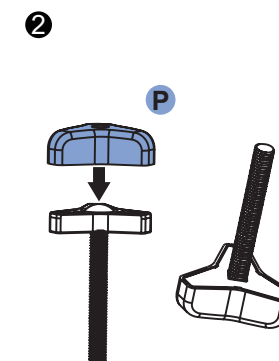


Cover the lid.

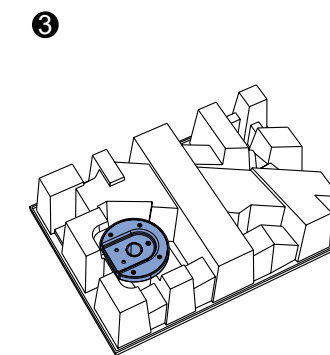


Remove the base cover and base from the bottom of the packaging tray.

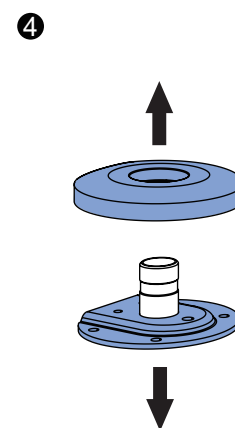


Separate the base cover and base.

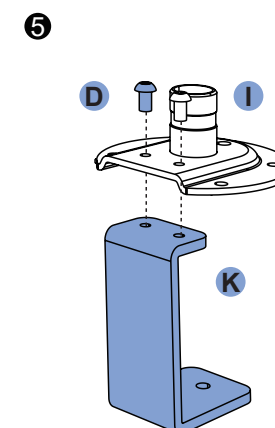


Fix the base and the clamp with screws.

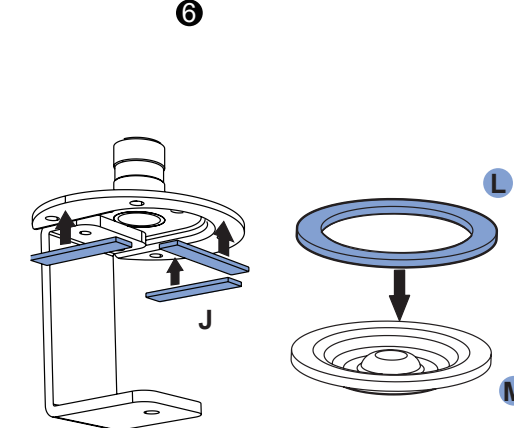

Remove the release paper from J and L. Connect them to the corresponding position according to the picture.






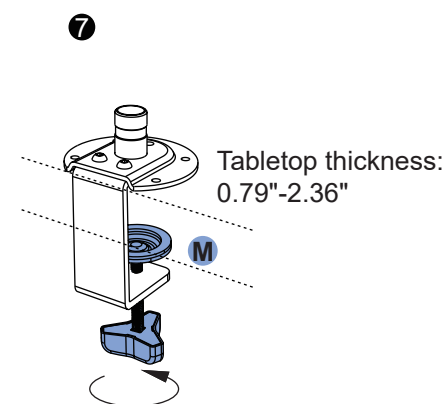


Place the assembled base on the table, and insert the assembled screw from the bottom. Then place the M and finally tighten screw to secure.

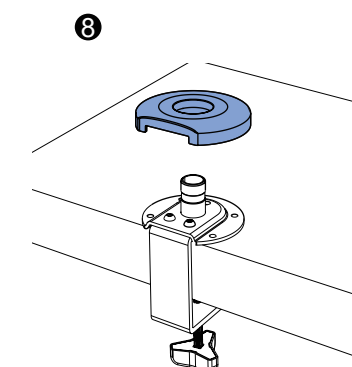


Cover the lid.

2-2 Punch Installation

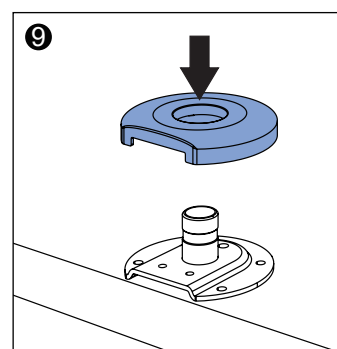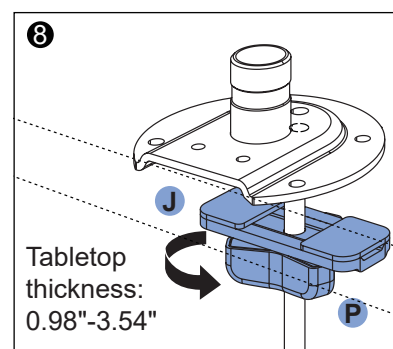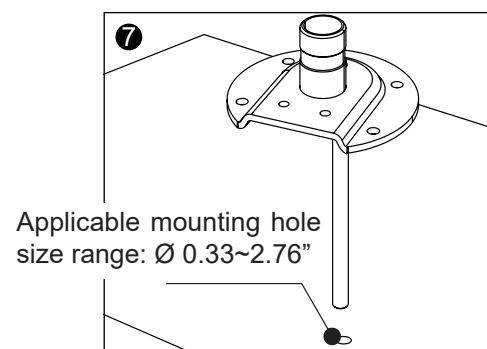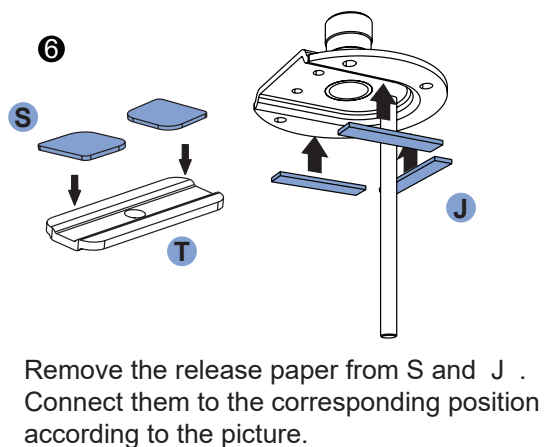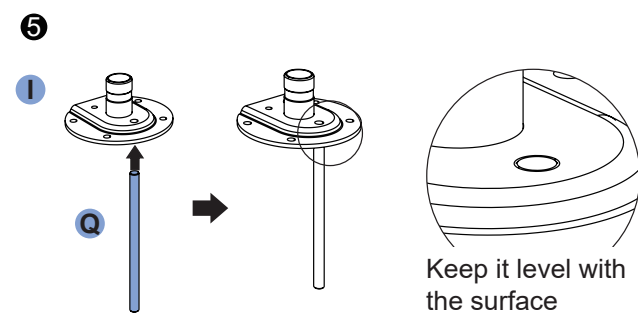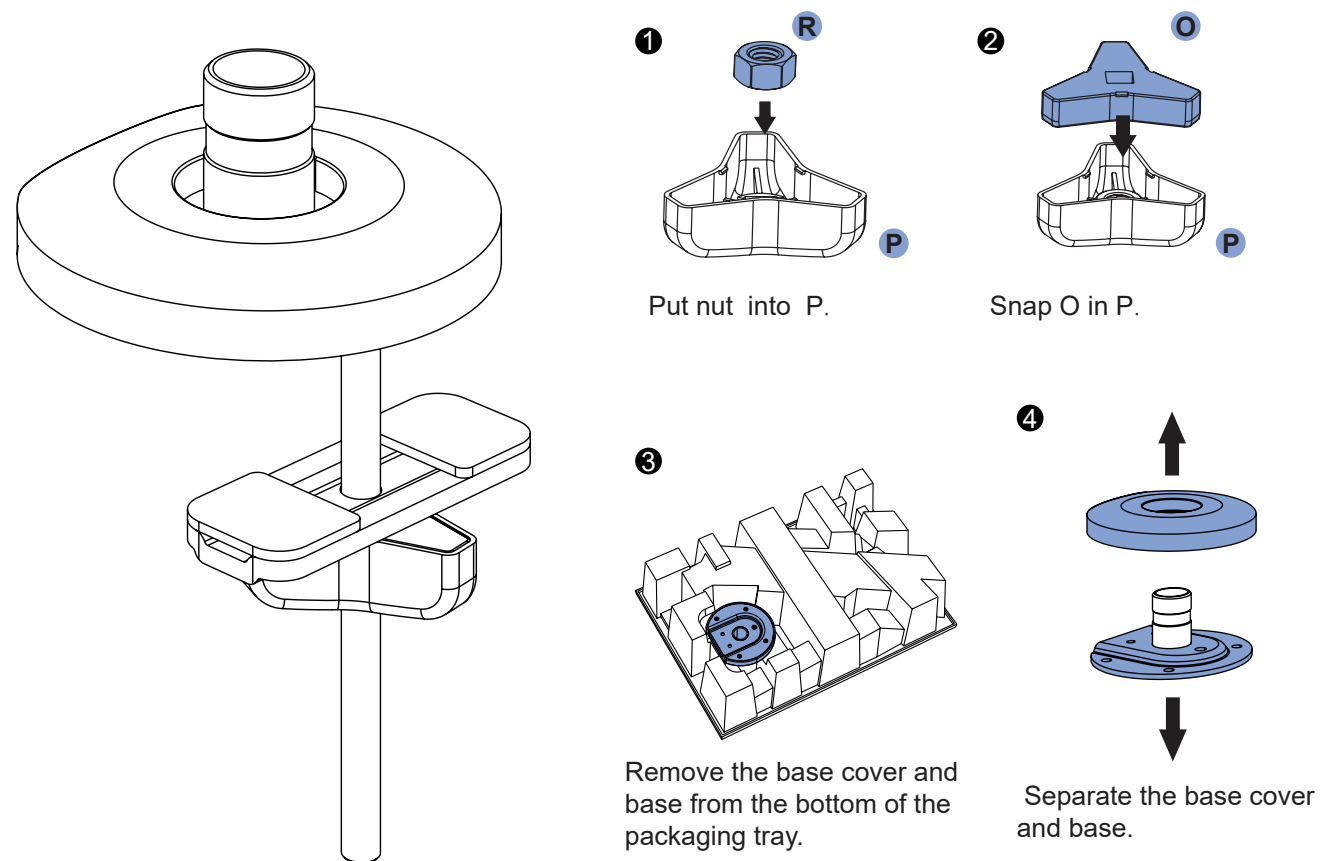


3 Arm Installation

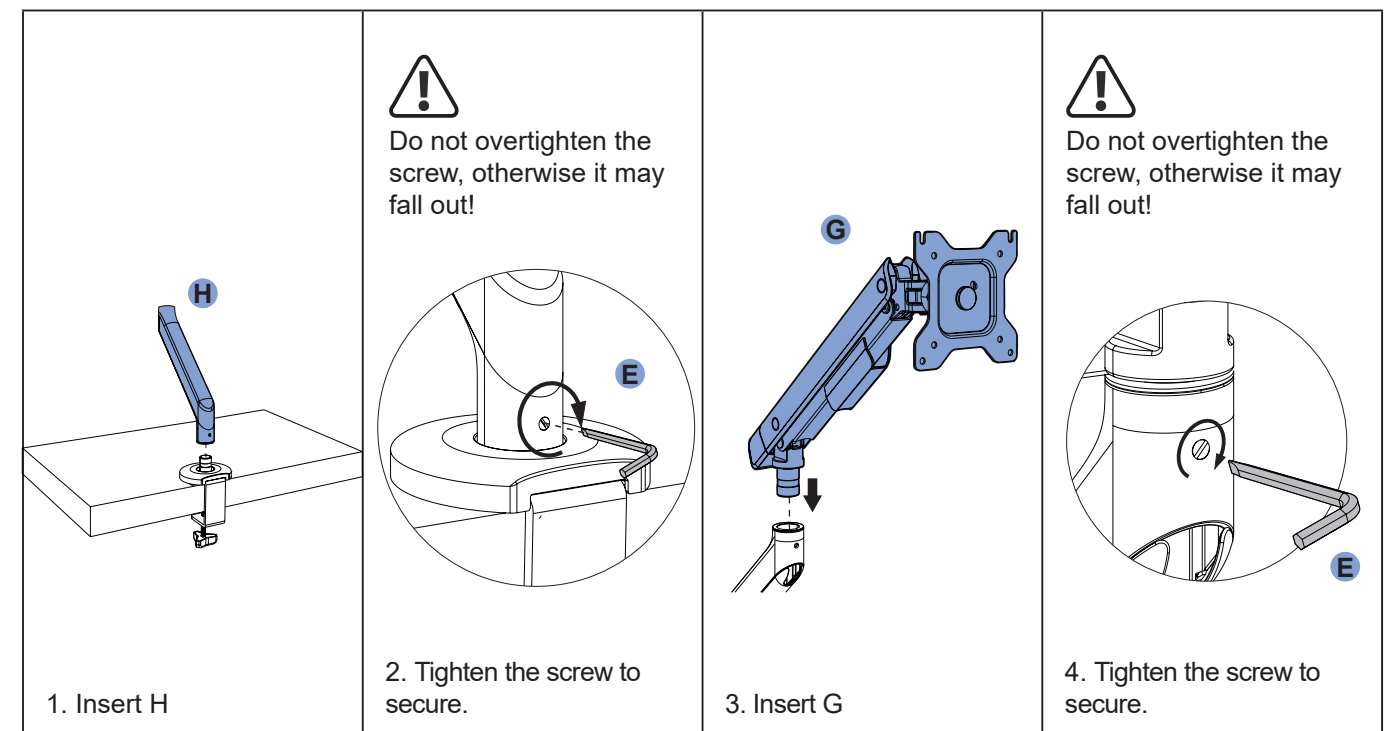



4 Monitor Connection



Note: After hanging the monitor on the mount, release the monitor slowly so it doesn't sink down too quickly.

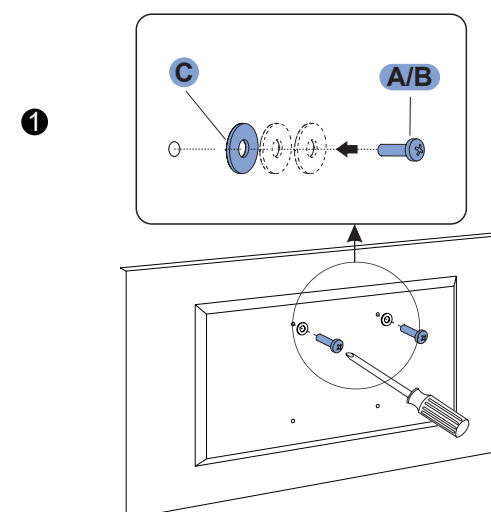


2

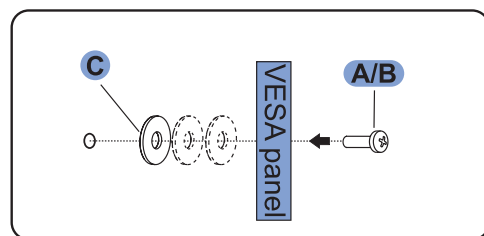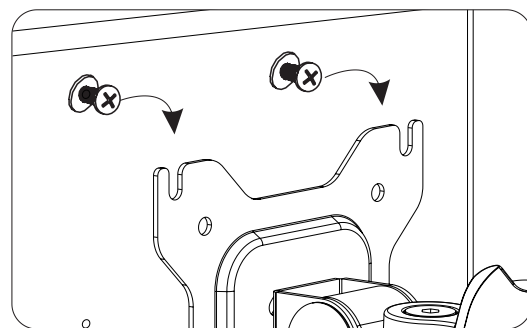

Insert the pre-tightened screws into the gourd holes on the upper part of the VESA panel, VESA panel.



3

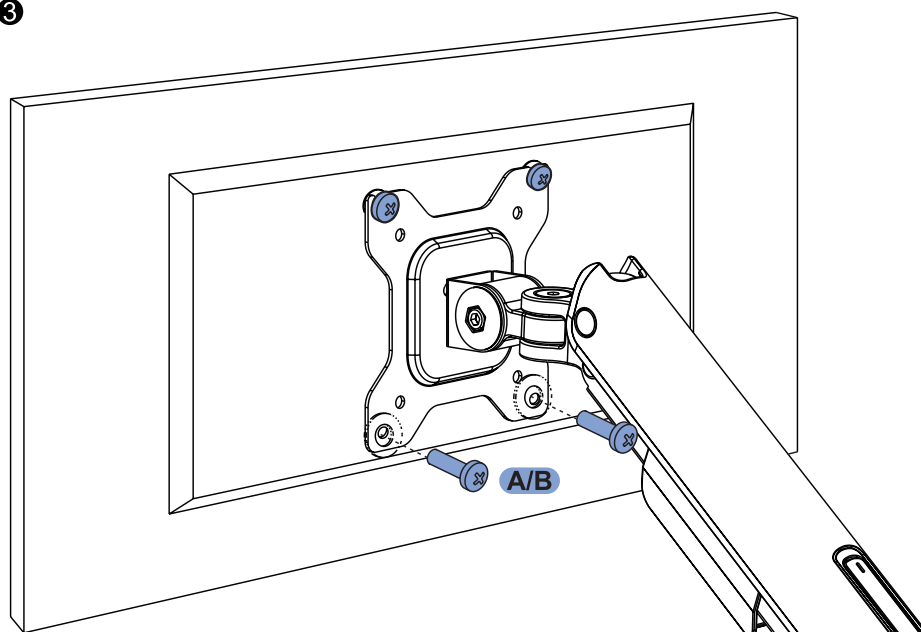

Tighten 4 screws.


5

Adjustment

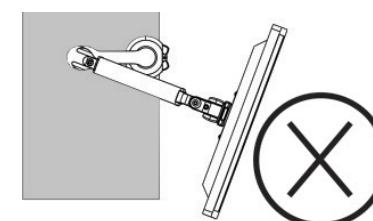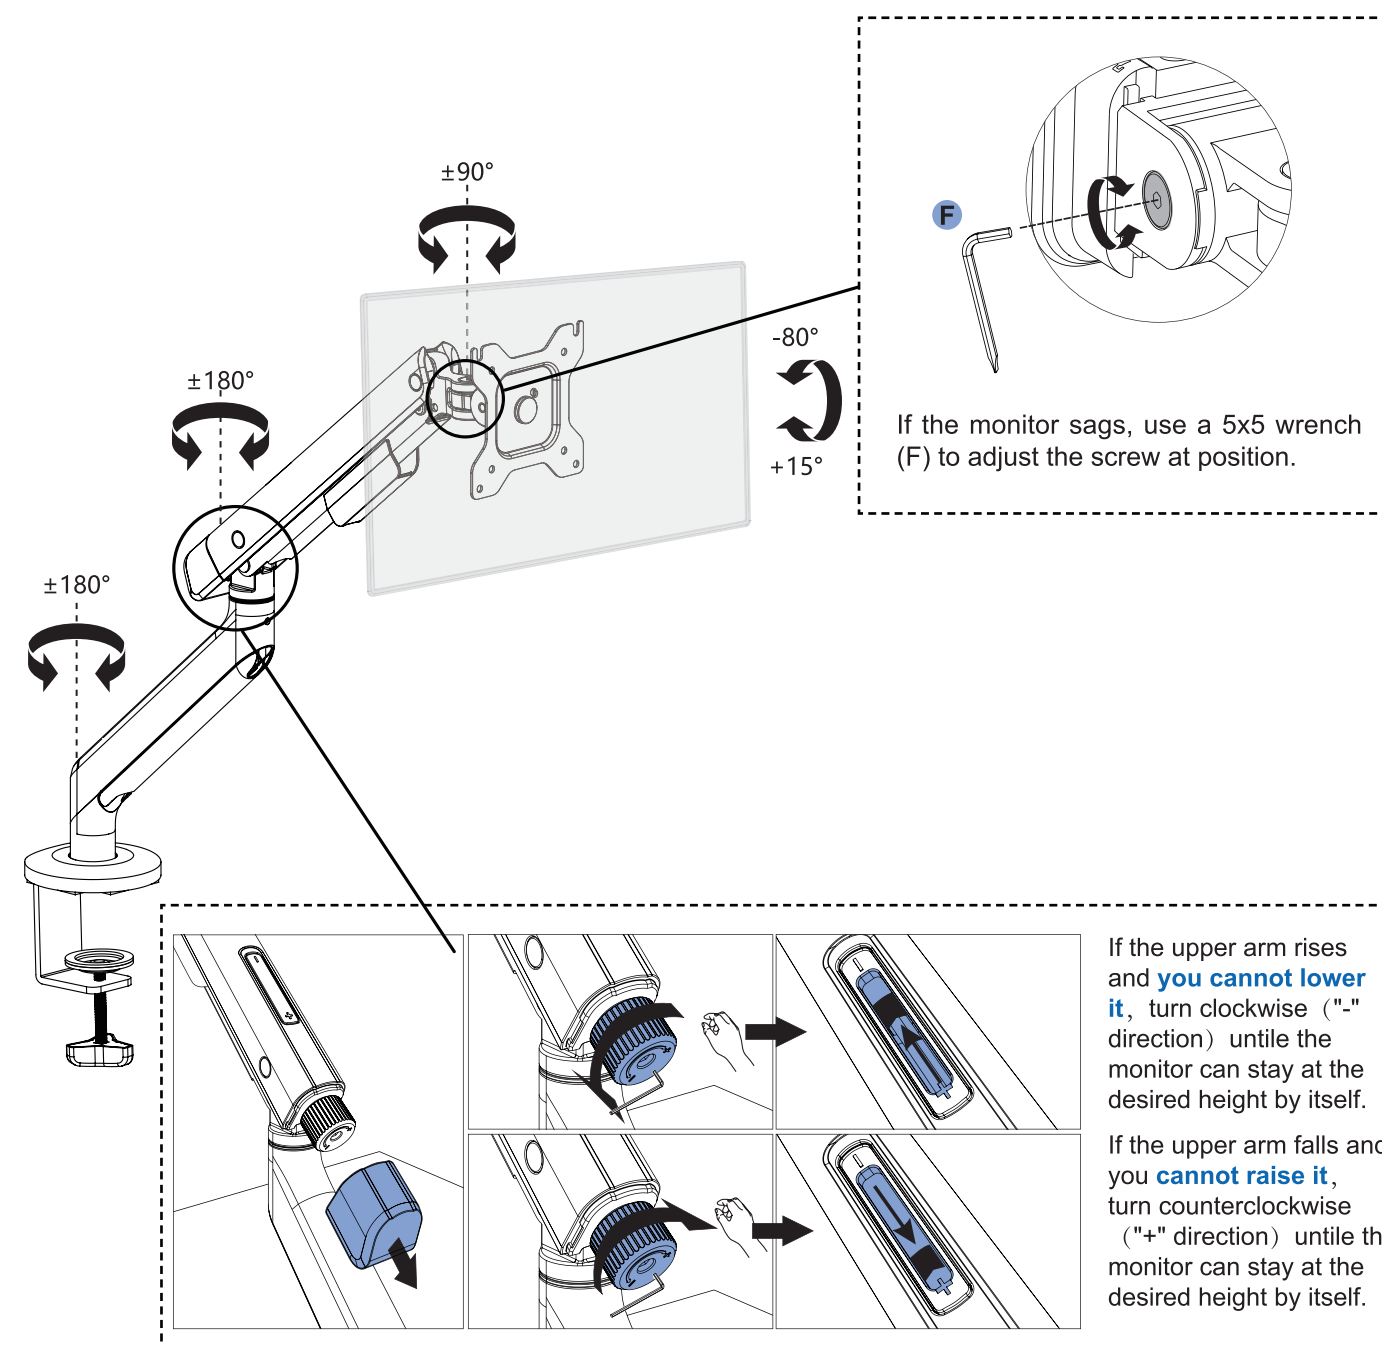

Do not rotate the monitor to the rear for use to avoid property damage and personal injury.

6 Cable Management

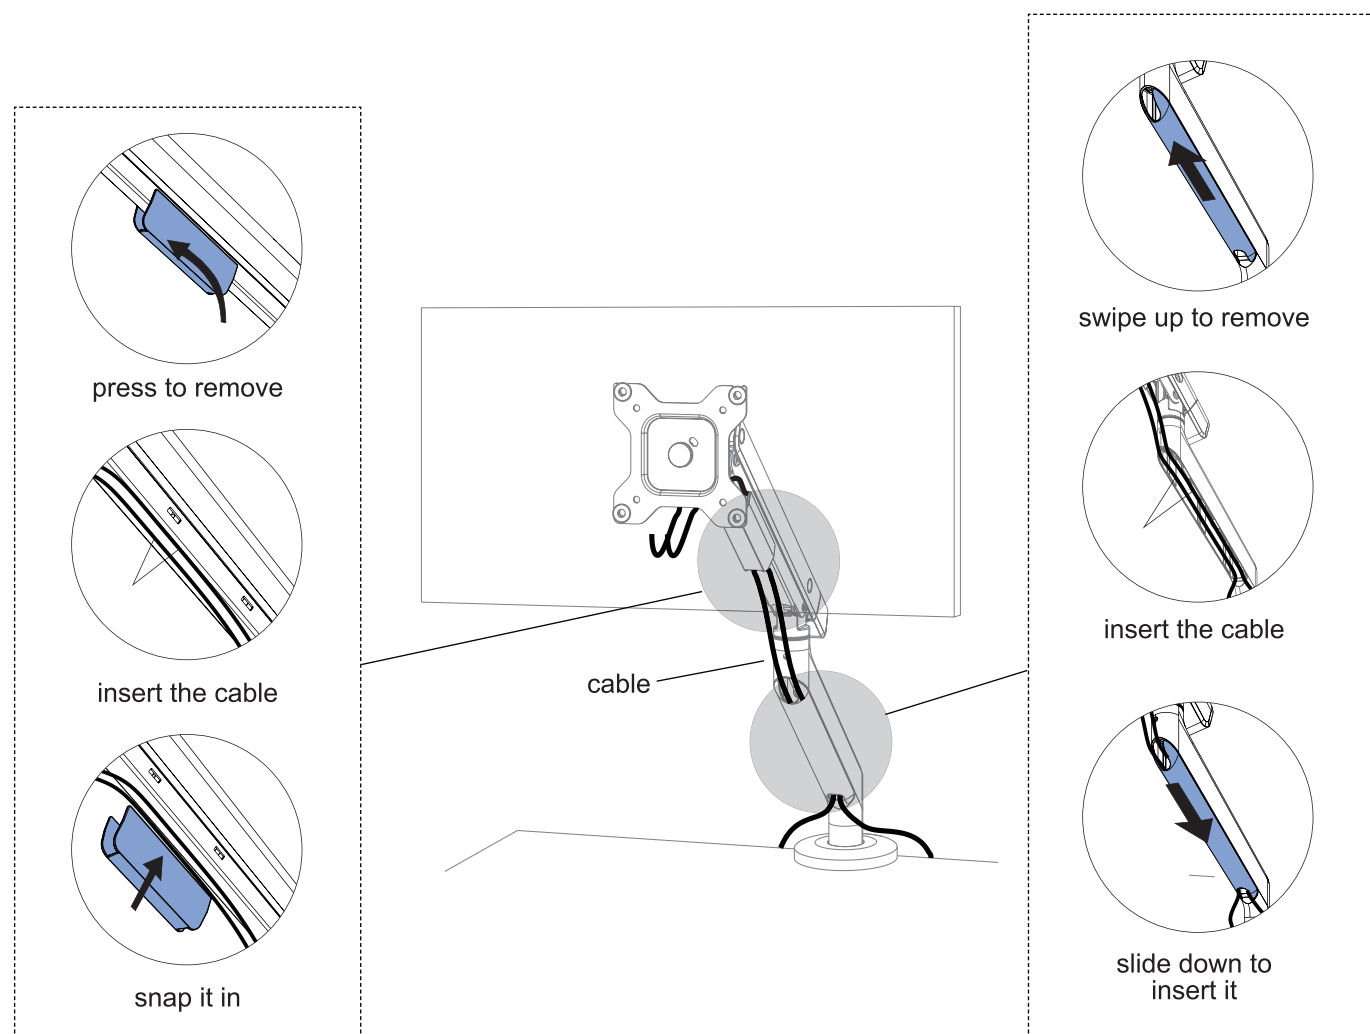

Please check the connecting parts in time every two months to confirm whether the screws are loose.