

# HOME SILENCE POD


P1S-1



USER MANUAL

## PRODUCT INTRODUCTION

- Net weight: 198kg (436.52lbs)
- Gross weight: 246kg (542.34lbs)
- Airflow: 30~60m³/h
- Rw: NIC+25dB
- D/C50: >0.76 STIA+

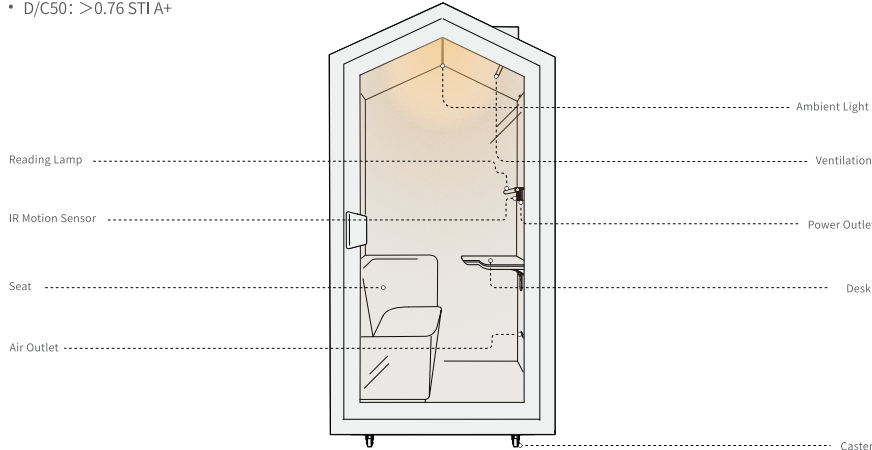


## READ BEFORE START

Thanks for choosing our product, please mind these tips below during the installation:


1. Two people should be prepared for the installation.
2. Please use cushioning material for stacking parts after unboxing in case of damaging floor or product.
3. Please don't scratch any piece with a sharp tool.
4. Please check all listed tools are prepared.
5. Please check the space for installation is sufficient.
6. Please follow the step by number to build.

## PRODUCT SPECS

- External size: W1100\*D900\*H2100mm (W43.31"D35.43"H82.68")
- Internal size: W994\*D793\*H1960mm (W39.13"D31.22"H77.17")
- Projected area: 0.99m²
- Main material: ABS/Carbonized polymer, PET, Aluminum, Stainless steel, ABS
- Furniture material: Birch Plywood, Steel, PU, PET

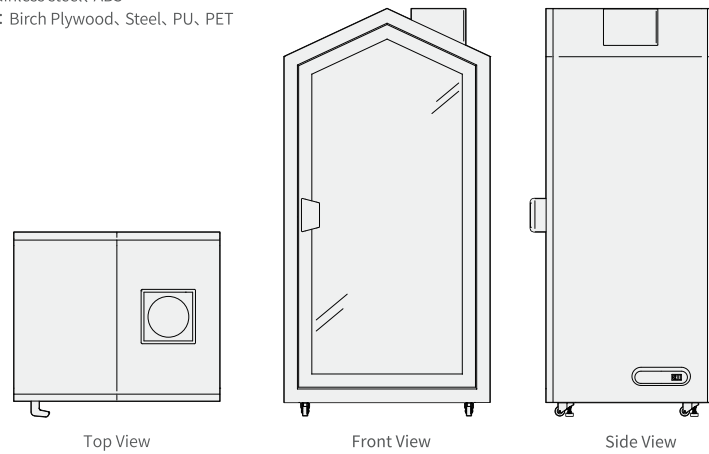

## CIRCUIT DIAGRAM

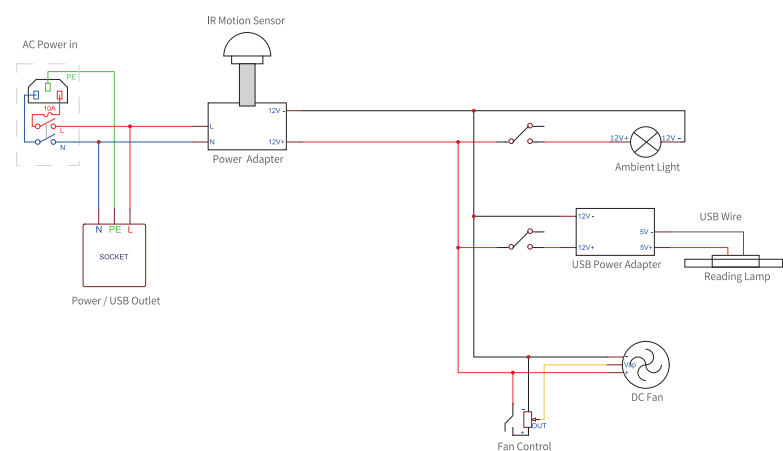

- Power Input : 100-220V~50/60Hz
- Power Output : 100-220V~50/60Hz, 5V 2.1A
- Maximum Power: 1000W
- Ambient Light: 3.5W, 170LM, 4000K
- Reading Lamp: 5W, 160LM, 3000K-6500K

## PARTS LIST

- Main part
- Upholstery
- Furniture
- Accessory
- Tool

Main part			
Code	Description	Qty.	Preview
A-01	Bottom panel	1	
A-02	Left side panel	1	
A-03	Right side panel	1	
A-04	Top panel	1	
A-05	Front frame & door	1	
A-06	Rear panel	1	

Upholstery			
Code	Description	Qty.	Preview
B-01	Left wall	1	
B-02	Right wall (upper)	1	
B-03	Right wall (lower)	1	
B-04	Ceiling(left)	1	
B-05	Ceiling(right)	1	
B-06	Carpet	1	
B-07	Right wall(mid)	1	

Furniture			
Code	Description	Qty.	Preview
C-01	Seat	1	
C-02	Desk	1	
C-03	Desk bracket	2	


Accessory			
Code	Description	Qty.	Preview
D-02	Bolt	34	
D-03	Eccentric wheel	34	
D-05	Bolt	6	
D-06	Bolt	6	
D-07	Lamp	1	
D-08	Lamp cover	1	
D-09	Power cable	1	
D-10	Door handles	2	
D-11	Latch	2	
D-12	Screw	6	

Tool			
Code	Description	Qty.	Preview
E-01	Perforation socket wrench	1	
E-02	Slotted screwdriver	1	
E-03	M6 hex key wrench	1	
E-04	M4 hex key wrench	1	


Table Accessory			
Code	Description	Qty.	Preview
A	Bolt	6	
B	Bolt	6	
C	Gasket	6	
D	M4 hex key wrench	1	

## ASSEMBLY INSTRUCTIONS


1




2

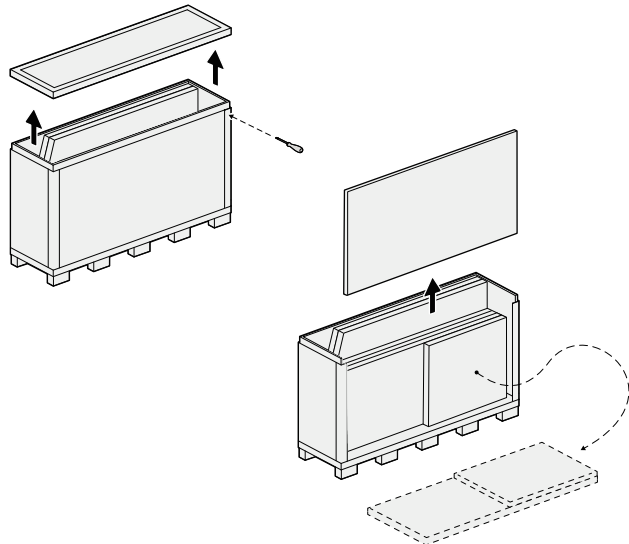


3

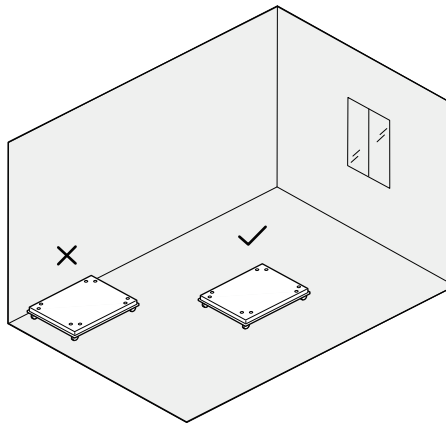


4

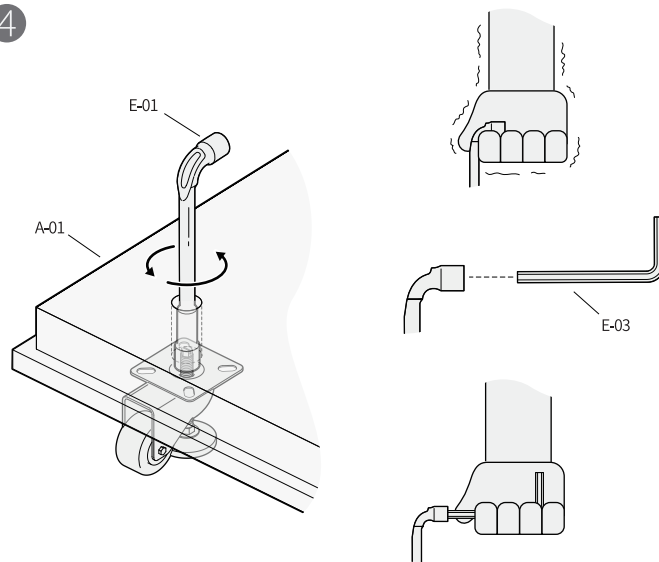


5

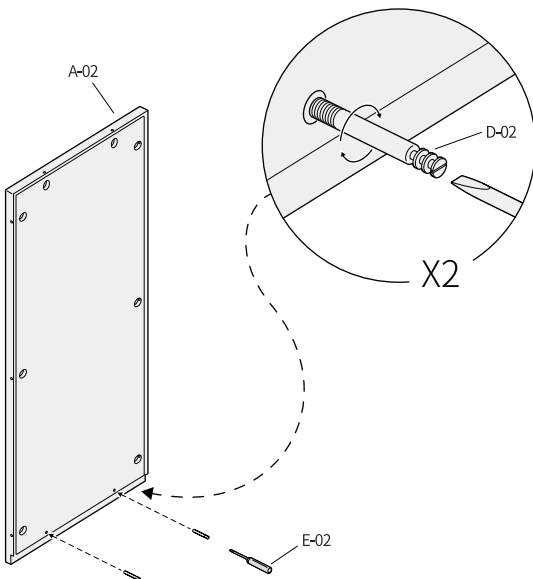


6

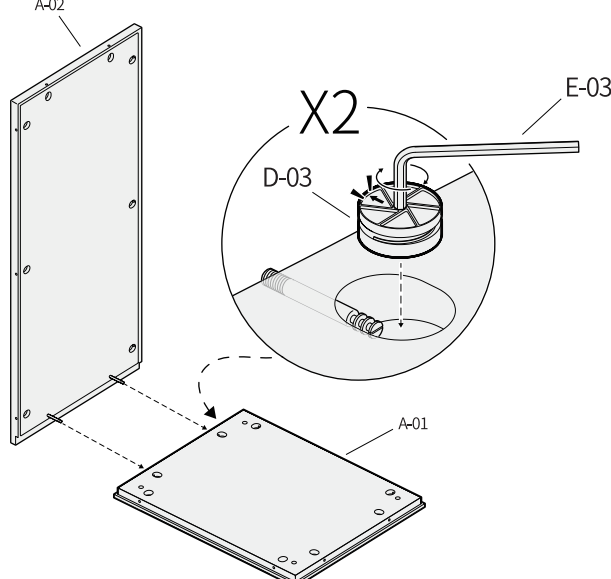


7

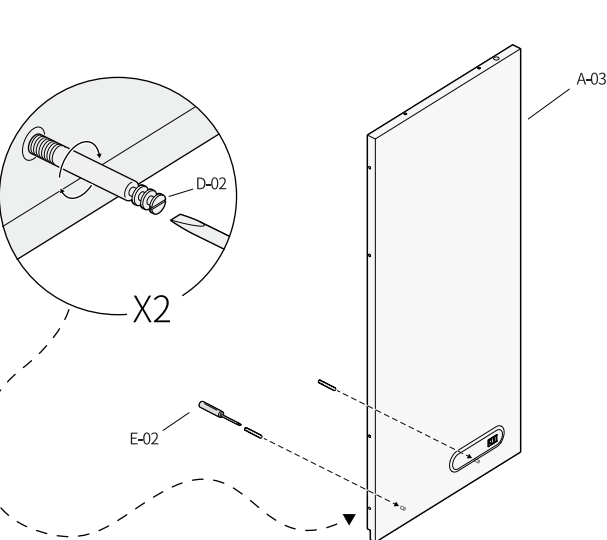

8

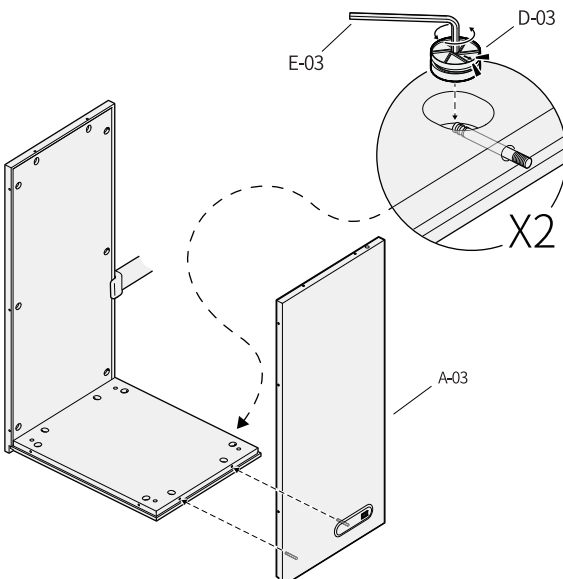

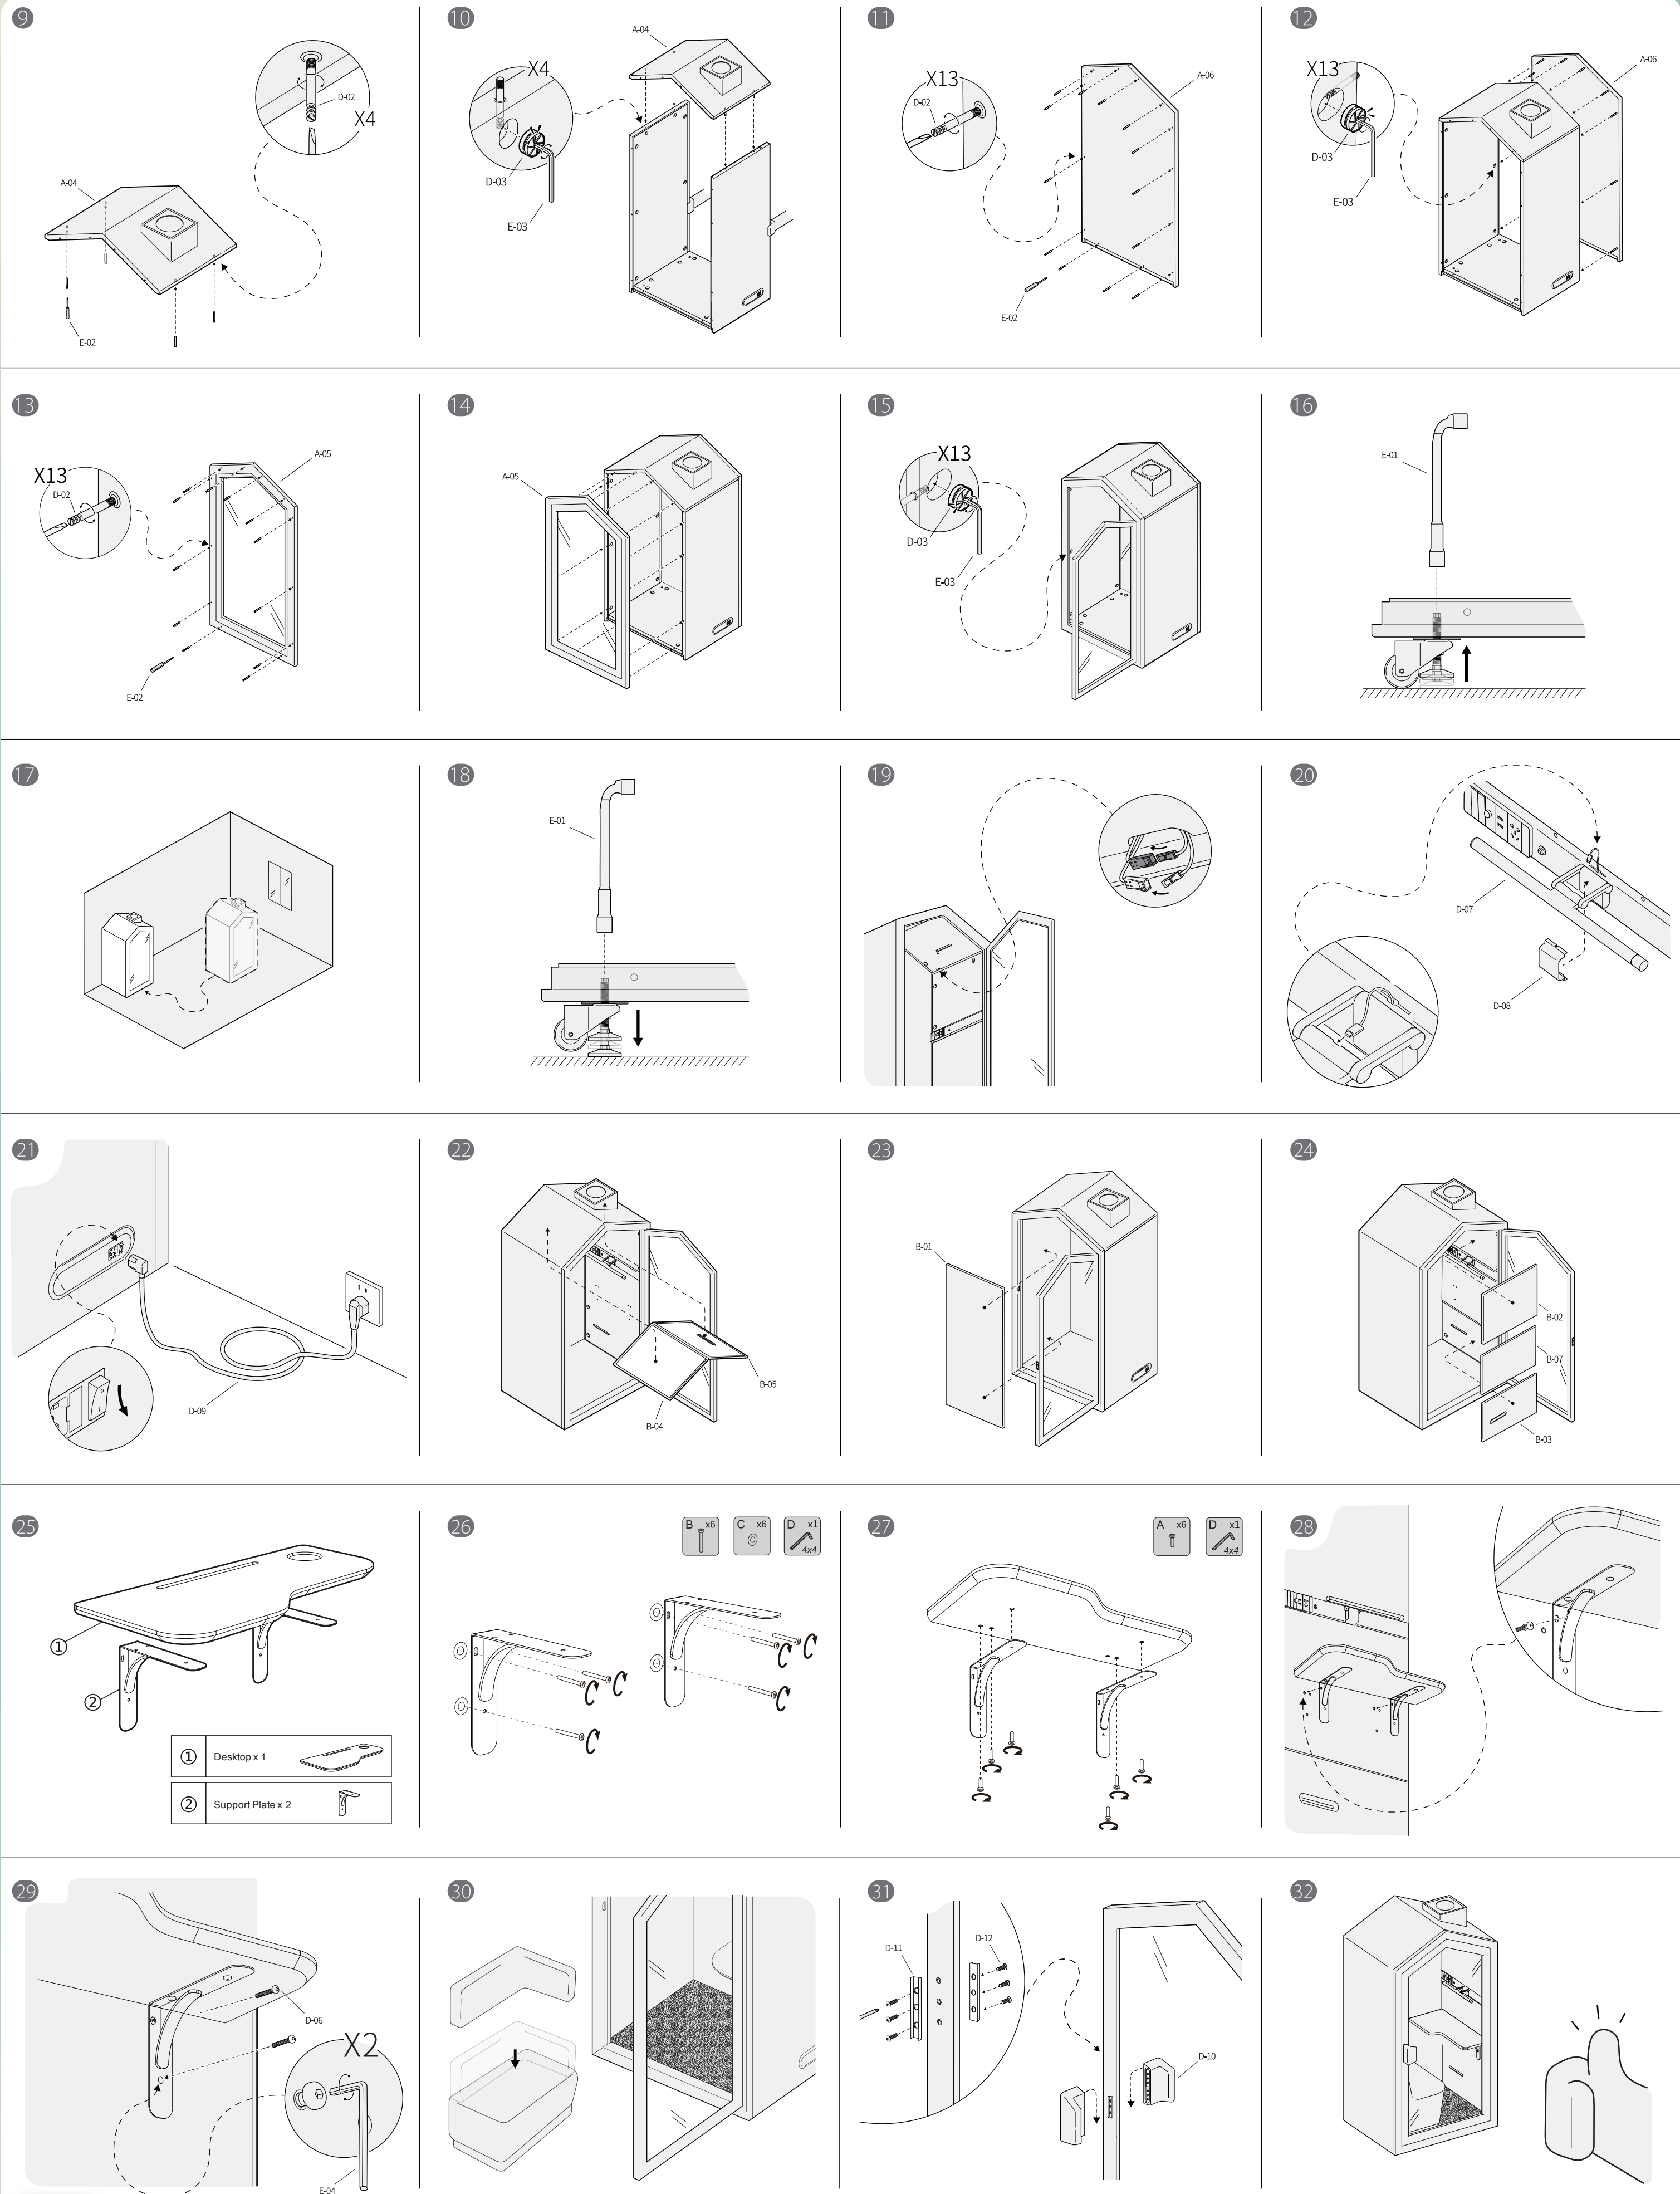

CAUTION

Warning

- Do not use any electronics exceeding 1000W in case of overload.
- Do not use the product if the ventilation channels are blocked, keep the ventilation channels free foreign objects and debris.
- Protect all electric hardware from damage, which could cause electrical leakage.
- Do not modify the product in case of a short circuit.
- Do not scratch glass with any sharp object.
- Do not smoke or light fires in the pod.
- Always set the caster to the non-moving state.
- Disconnect the power cord from the power outlet before starting any cleaning, maintenance, or disassembly procedures.
- Do not use the product if the ventilation is not functioning.
- Do not climbing on top of the product or place any load on the top of the product.
- Do not use this product in an environment with oxygen concentration lower than 20%.
- Do not slam the door.
- Do not use this product outdoors.

Maintenance & Care

- Please contact authorized personnel for repairing, don't operate without official instruction.
- Make sure the power cord is plugged in properly.
- Check if the fuse is burnt out.
- Check that the wire terminal is firmly connected to the wire following the correct label.

Problem & Solution

- In case of no power from the power outlets and the fan or lamp doesn't work.
- Make sure the power cord is plugged in properly.
- Check if the fuse is burnt out.
- Check that the wire terminal is firmly connected to the wire following the correct label.

Recycling and Disposal



This product cannot be disposed of as household waste. To prevent damage to the environment, this product should be recycled. Please use the relevant recycling systems available to you or contract the distributor or manufacturer for recycling assistance.